




Philips Pronto
In-wall Control Panel

Pronto

TSW9500

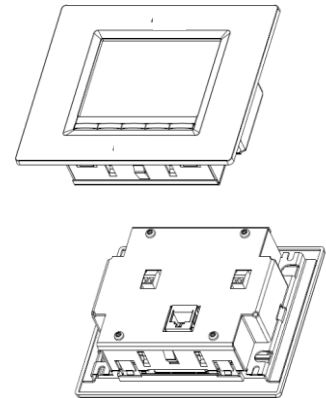

Designed by installers, made by Philips

A touch of elegance

- 3.5" color LCD touch screen
- Un-intrusive, sleek design
- Non-branded and re-paintable front plate

Ultimate convenience

- 5 freely programmable firm keys
- Easy installation with dedicated wall box
- Ethernet connection and IR out port
- Supports power over Ethernet (PoE)

Full compatibility

- Works with Pronto extenders
- Re-use of existing files with auto-conversion
- Programmable using ProntoEditProfessional 3
- Supports 2-way ProntoScript modules

Specifications

Picture/Display

- Diagonal screen size (inch): 3.5 inch
- Display colors: 65,536
- Resolution: 320 x 240 pixels (QVGA), landscape orientation
- Display screen type: LCD TFT
- Touch panel
- 5 extra buttons below the screen
- Re-paintable front plate

Connectivity

- USB 2.0
- Connector: Mini USB, easily accessible from the front
- Ethernet CAT5 RJ45 connector
- Network mode: DHCP, Fixed IP
- IR output (2wire screw terminal)

Power

- 9-24 VDC
- 2-wire screw terminal
- Power over Ethernet (PoE – 802.3af compliant)

Accessories

- Printed User Guide
- 1 white front plate included
- Wall box available separately

Related type numbers

- TSW9501/00 Wall box

System Specifications

- CPU: Freescale 32 bit RISC
- CPU speed: 266 MHz
- Flash memory size: 48 MB
- Ram size: 64 MB

Customization

- Configurable using ProntoEdit Professional version 3 or higher
- Full screen configurability
- Automatic conversion of TSU9600/9800 configurations
- Macros: Up to 250 steps
- Configurable personal IR database

Infrared Capabilities

- Wired IR output (for local IR routing)
- Universal IR code database

System Requirements

- Processor: 1.33 GHz or more
- PC OS: Windows XP, Vista, Windows 7
- Free hard disk space: 512 MB or more
- RAM memory: 1 GB or more

Product dimensions (inches)

- Wall box (WxHxD): 4.4 x 3.7 x 2.36
- In-wall panel (WxHxD): 5.12 x 4.33 x 1.29
- Front plate (WxHxD): 5.12 x 4.33 x 0.14

Product dimensions (mm)


- Wall box (WxHxD): 112 x 94 x 60
- In-wall panel (WxHxD): 130 x 110 x 33
- Front plate (WxHxD): 130 x 110 x 3.5

Wall requirements (inches)


- Dry wall: thickness min 0.35, max 0.79
- Plaster wall: thickness min 0.35, max 0.79
- Solid wall: NA

Wall requirements (mm)


- Dry wall thickness: min 9, max 20
- Plaster wall thickness: min 9, max 20
- Solid wall: NA

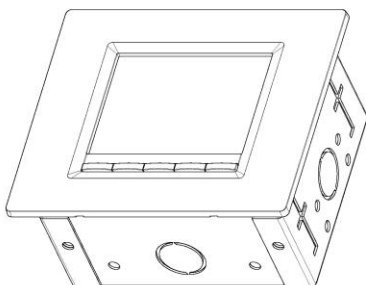

TSW9500 mounted in wall box

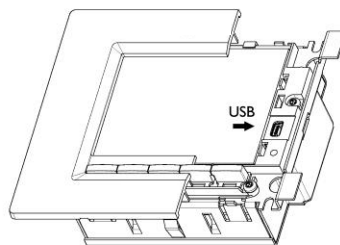

TSW9500 front view
removable front plate

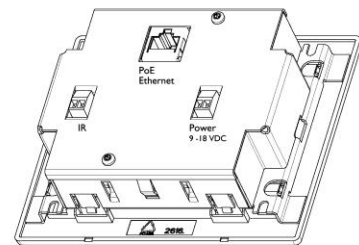

TSW9500 back view
connections